





CR 1/8, 1/4

LEADFREE
RoHS Compliant

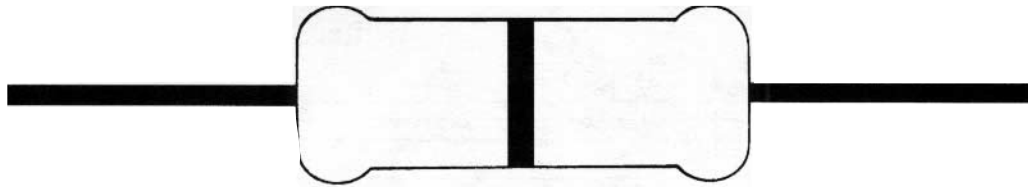

ZERO OHM RESISTOR


MECHANICAL OUTLINES

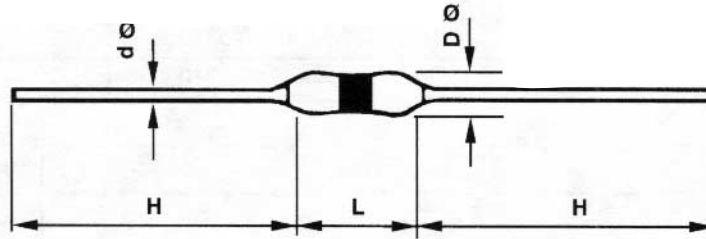

DIMENSIONS (mm)

Wattage	L	D ϕ	H	d ϕ	Dielectric Withstanding Voltage	Current Rating @70°C
1/8 W	3.2 \pm 0.4	1.5 \pm 0.2	27min	0.5 \pm 0.02	300V RMS min	2 Amps
1/4 W	6.0 \pm 0.5	2.3 \pm 0.2	27min	0.6 \pm 0.02	500V RMS min	3 Amps

PACKING: Resistors supplied on reels of 5000 pieces per EIA RS-296-C

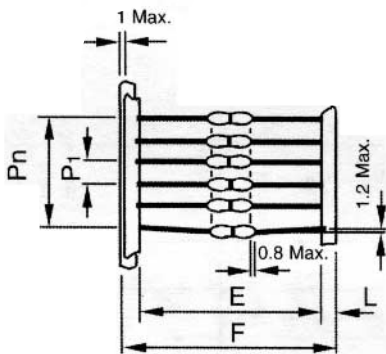

	DIMENSIONS (mm)	Inches
E	53 \pm 0.5.....	2.090 \pm .020
F	6.6 \pm 0.5.....	2.600 \pm .020
P ₁	5.08 \pm 0.4.....	.200 \pm .015
P _n	500 \pm 4.....	19.685 \pm .157
n:	100 spacings	
L	6.35 \pm 0.25.....	.250 \pm .010

Operating Temperature: -55°C~+155°C

Resistance: 0.01 or less

Part Numbering system

CR

Type
CR

1/4

Rated Power (W)
1/8W
1/4W

0R0

Ohmic Value
0 OHM

TR

Packaging	
Code	Description
TB	Tape & Box
TR	Tape & Reel