

GENERAL PURPOSE RECTIFIER


1A1 THRU 1A9	VOLTAGE RANGE	50 to 1500 Volts
	CURRENT	1.0 Ampere

FEATURES

- Low reverse leakage
- High forward surge current capacity
- High temperature soldering guaranteed:
260 /10 seconds, 0.375" (9.5mm) lead length

MECHANICAL DATA

- Case: transfer molded plastic
- Epoxy: UL94V – 0 rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: any
- Weight: 0.007 ounce, 0.20 gram

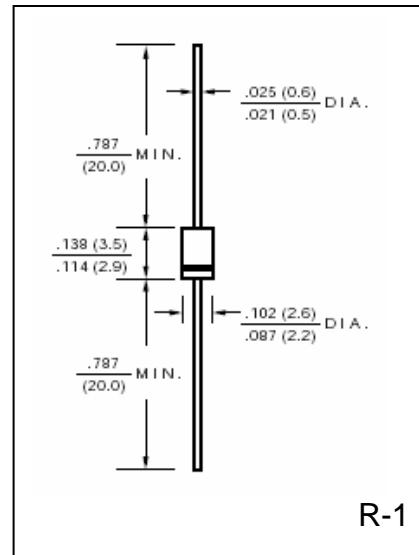

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	1A1	1A2	1A3	1A4	1A5	1A6	1A7	1A8	1A9	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	1200	1500	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	840	1050	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	1200	1500	Volts
Maximum Average Forward Rectified Current, 0.375" (9.5mm) lead length at $T_A = 25^\circ C$	$I_{(AV)}$	1.0									Amps
Peak Forward Surge Current	I_{FSM}	25									Amps
8.3ms single half sine wave superimposed on rated load (JEDEC method)	I_{FSM}	25									Amps
Maximum Instantaneous Forward Voltage @ 1.0A	V_F	1.1									Volts
Maximum DC Reverse Current at Rated $T_A = 25^\circ C$	I_R	5.0									μA
DC Blocking Voltage per element $T_A = 100^\circ C$		50									
Maximum Full Load Reverse Current, full cycle Average 0.375" (9.5mm) lead length at $T_L = 75^\circ C$	$I_{R(AV)}$	30									μA
Typical Junction Capacitance (Measured at 1.0MHz and applied reverse voltage of 4.0V)	C_J	15									pF
Typical Thermal Resistance (Note 1)	$R_{\theta JA}$	50									$^\circ C/W$
Operating Junction Temperature Range	T_J	(-65 to +175)									$^\circ C$
Storage Temperature Range	T_{STG}	(-65 to +175)									$^\circ C$

Notes:

Thermal resistance from junction to ambient with 0.375" (9.5mm) lead length, PCB mounted



RATINGS AND CHARACTERISTIC CURVES 1A1 THRU 1A9

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

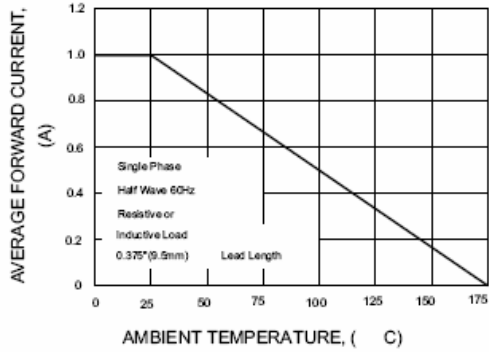


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

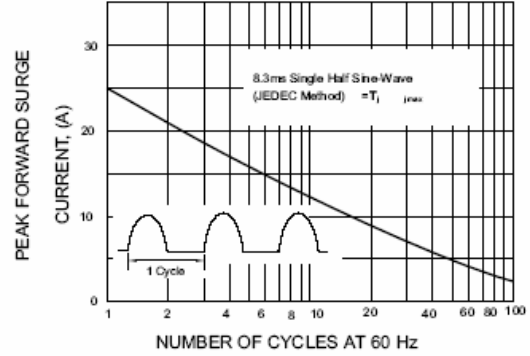


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

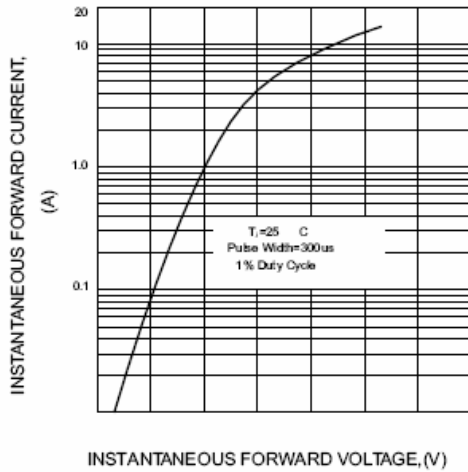


FIG.4-TYPICAL REVERSE CHARACTERISTICS

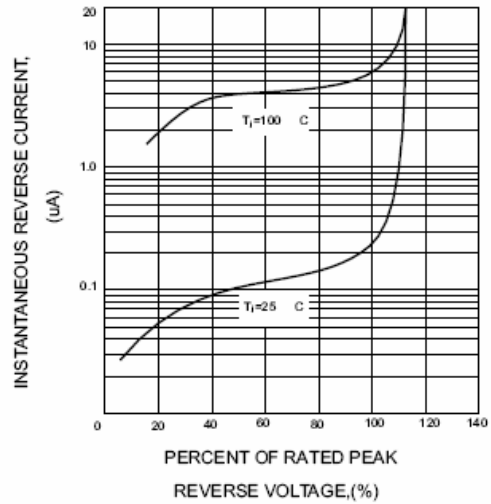


FIG.5-TYPICAL JUNCTION CAPACITANCE

