



AUTOMOTIVE RECTIFIER

RAS5005 THRU RAS5010

VOLTAGE RANGE
CURRENT


50 to 1000 Volts
50.0 Ampere

FEATURES

- Low Leakage
- Low forward voltage drop
- High current capability
- High forward surge current capacity

MECHANICAL DATA

- Case: transfer molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Lead: Plated slug, solderable per MIL-STD-202E method 208C
- Polarity: color ring denotes cathode end
- Mounting Position: any
- Weight: 0.064 ounce, 1.82 gram

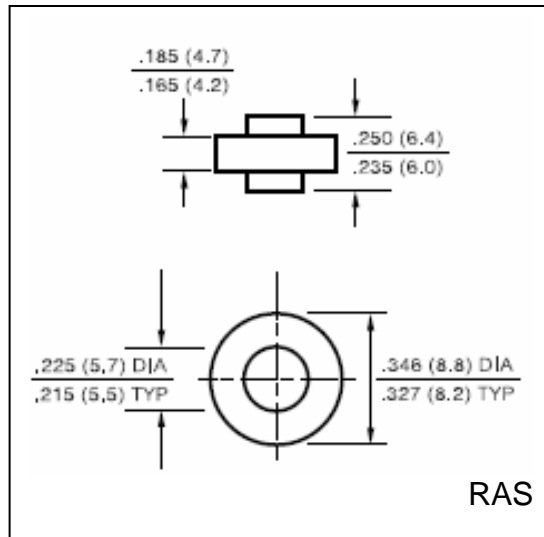

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	RAS 5005	RAS 501	RAS 502	RAS 504	RAS 506	RAS 508	RAS 5010	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current, At $T_C = 105^\circ\text{C}$	$I_{(AV)}$	50.0							Amps
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)	I_{FSM}	600							Amps
Maximum Instantaneous Forward Voltage @ 50.0A	V_F	1.08							Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage per element	I_R	$T_A = 25^\circ\text{C}$ 5.0							μA
		$T_A = 100^\circ\text{C}$ 400							
Typical Thermal Resistance	$R_{\theta JC}$	0.8							$^\circ\text{C}/\text{W}$
Operating Junction Temperature Range	T_J	(-65 to +175)							$^\circ\text{C}$
Storage Temperature Range	T_{STG}	(-65 to +175)							$^\circ\text{C}$

Notes:

1. Proper heatsinking must be provided



RATINGS AND CHARACTERISTIC CURVES RAS5005 THRU RAS5010

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

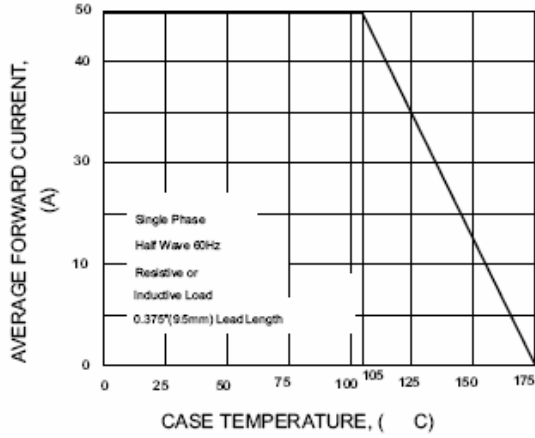


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

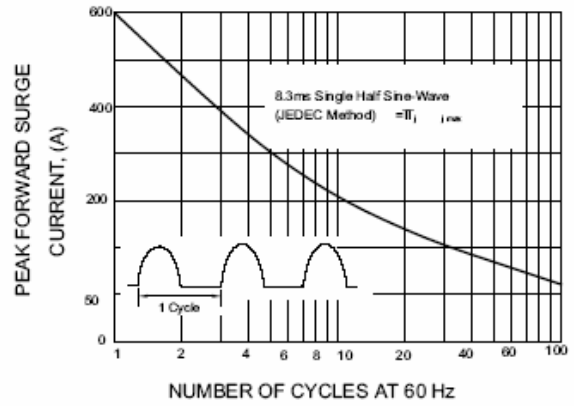


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

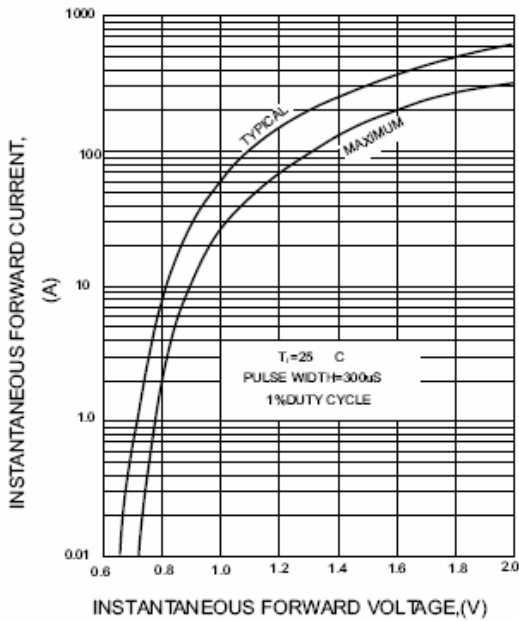


FIG.4. FORWARD POWER DISSIPATION

