Pro Components

Din 41612
96P, Male, Right Angle, Type C, 3 Rows without Boardlock
131-962-10-10-10

Lead Free RoHS Compliant

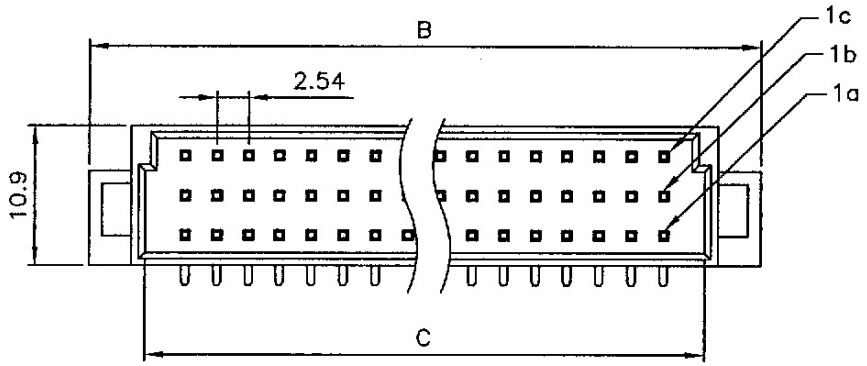

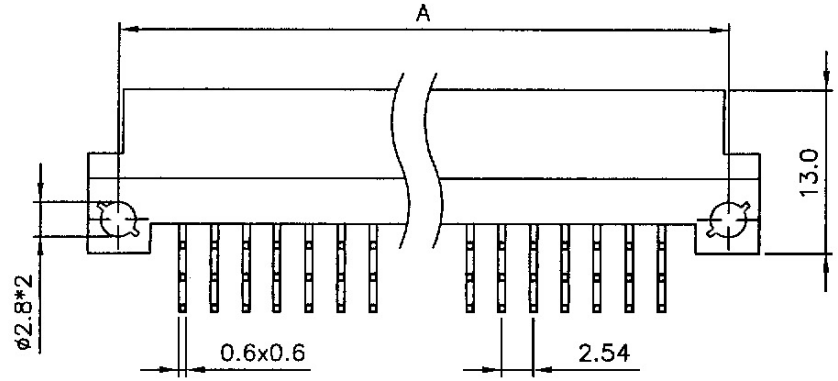

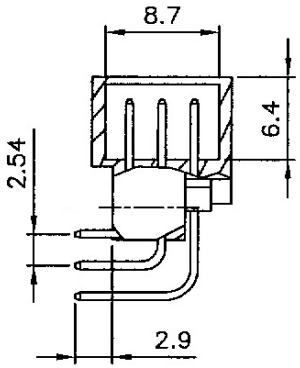

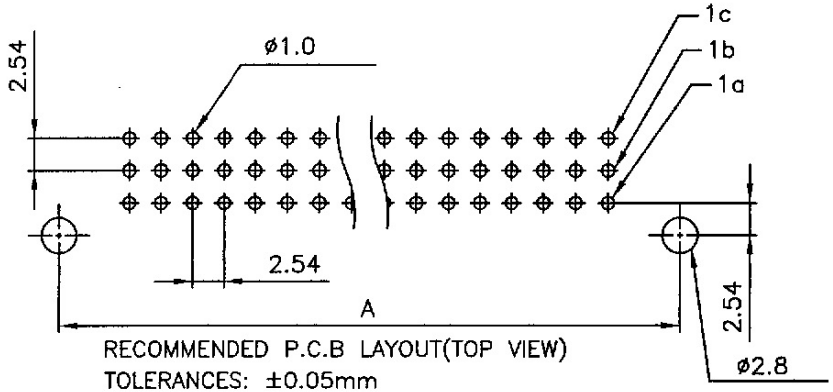

POS.	A	B	C
96pos.	88.90	94	85.5

Specifications

Operating Voltage: 250 VAC Max.
Current Rating: 3 Amps
Withstand Voltage: 1000V AC/min
Contact Resistance: 20m ohms max.
Insulator Resistance: 3000 Megohms min. @ 500 VDC
Operating Temperature : -55C ~ +125C
Rivet,Boardlock: Copper Alloy
Contact Material: Copper Alloy
Insulator Material: Thermal Plastic UL 94V-0
Underplate: 50u" Nickel
Contact Area: Selective Gold
Solder Tails Area: 100u" Tin/Lead

Part Number

131-962-10-10-10

General Tolerance	
X. ± 0.50	X.˚ ± 5˚
.X ± 0.20	.X˚ ± 2˚
.XX ± 0.10	.XX˚ ± 1˚
Units : mm	

Rev. No. : TE09