
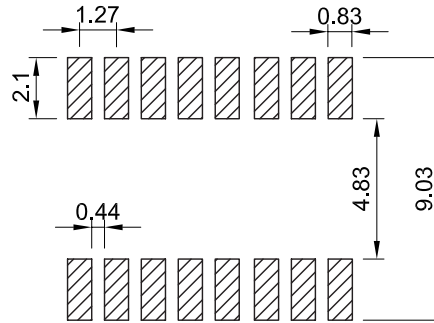


Recommended P.C. Board SMD Layout

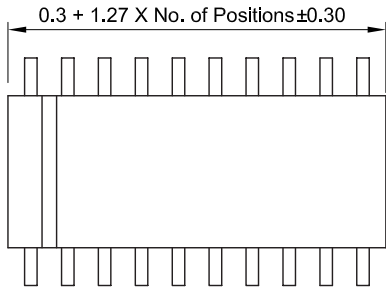



Specifications

- Current Rating: 3 Amps
- Insulator Resistance: 1000 Megohms min.
- Contact Resistance: 20 m ohms max.
- Dielectric Withstanding: AC 500V
- Operating Temperature: -40°C ~ +105°C
- Contact Material: Phosphor Bronze
- Insulator Material: Polyester, UL 94V-0 Nylon-6T
- Contact Plated: *see options below
- Standard: Full Gold Flash

Part Numbering System

FH127C-H3.45W5.23RD - XX - X X X N

- Series _____
- No. of Contact: _____
- Contact Plating: _____
- Cap Option: _____
- Nil = No Cap
- F = Film
- M = Metal
- P = Plastic
- Packing Method: _____
- B = Tube
- T = Tape & Reel
- Insulator Material: _____
- N = High Temperature Nylon-6T

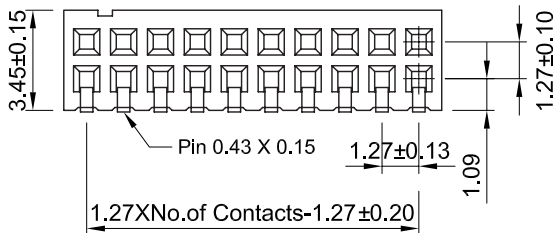

* Contact Plating Option	Full Gold Plating	Gold Plated On Contact Area Tin Plated on Solder Area	Full Tin Plating
	G : Gold Flash G10: Gold 10u" G15: Gold 15u" G30: Gold 30u"	S: Gold Flash S10: Gold 10u" S15: Gold 15u" S30: Gold 30u"	T: Tin 100u"

General Tolerance	
X. ± 0.50	X.° ± 5°
.X ± 0.20	.X° ± 2°
.XX ± 0.10	.XX° ± 1°
Units : mm	