
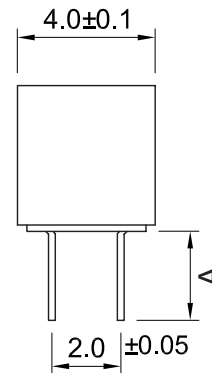
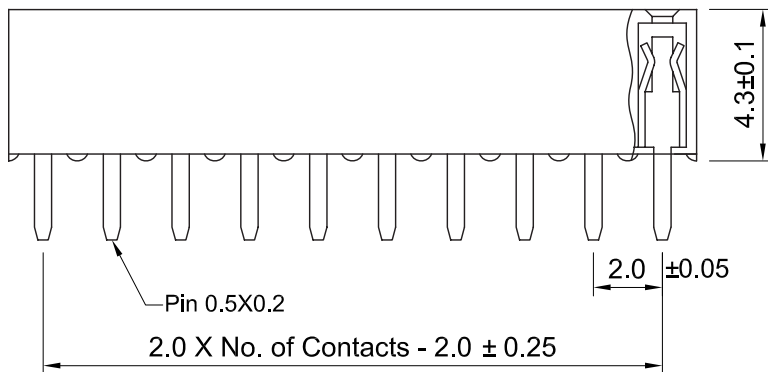


### Recommended P.C. Board Hole Layout

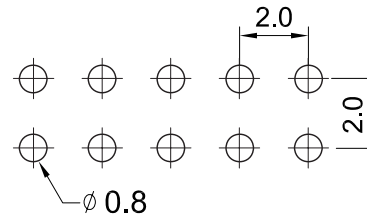

## Specifications

- Current Rating: 2 Amps
- Insulator Resistance: 1000 Megohms min.
- Contact Resistance: 20 m ohms max.
- Dielectric Withstanding: AC 500V
- Operating Temperature :  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- Contact Material: Phosphor Bronze
- Insulator Material: Polyester, UL 94V-0, Nylon-6T
- Contact Plated: See Option / Standard = Full Gold Flash

## Part Numbering System

**FH200H4.3W4.0SD XXX - XX - X N**

Series

Terminal Length(A):

L3.0 = 3.0mm

L2.4 = 2.4mm (Standard)

No. of Pins

Contact Plating

Insulator Material:

N = High Temperature Nylon-6T

* Contact Plating Option	Full Gold Plating	Gold Plated On Contact Area Tin Plated on Solder Area	Full Tin Plating
	G : Gold Flash G10: Gold 10u" G15: Gold 15u" G30: Gold 30u"	S: Gold Flash S10: Gold 10u" S15: Gold 15u" S30: Gold 30u"	T: Tin 100u"

General Tolerance	
X. $\pm 0.50$	X.° $\pm 5^{\circ}$
.X $\pm 0.20$	.X° $\pm 2^{\circ}$
.XX $\pm 0.10$	.XX° $\pm 1^{\circ}$
Units : mm	