
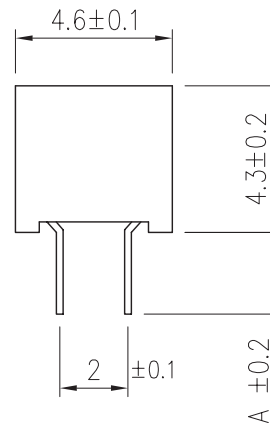
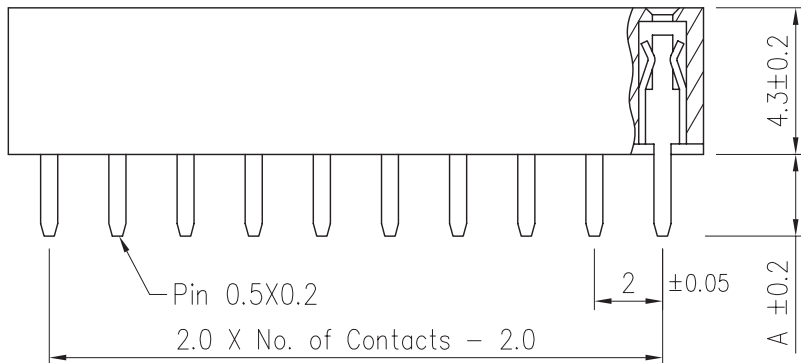


Recommended

P.C. Board Hole Layout

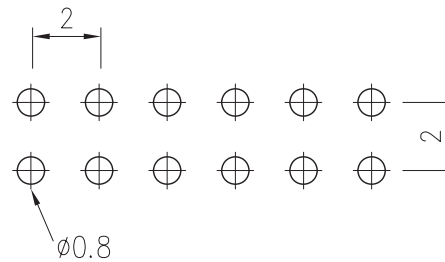

Specifications

Current Rating: 2 Amps
Insulator Resistance: 1000 Megohms min.
Contact Resistance: 20 m ohms max.
Dielectric Withstanding: AC 500V
Operating Temperature : -40°C ~ +105°C
Contact Material: Phosphor Bronze
Insulator Material: Polyester, UL 94V-0, Nylon-6T
Contact Plated: See Option / Standard = Full Gold Flash

Part Numbering System

FH200H4.3W4.6SD XXX - XX - X N

Series

Terminal Length(A):

L3.0 = 3.0mm

L2.4 = 2.4mm

L1.6 = 1.6mm

No. of Pins

Contact Plating

Insulator Material:

N = High Temperature Nylon-6T

* Contact Plating Option	Full Gold Plating	Gold Plated On Contact Area Tin Plated on Solder Area	Full Tin Plating
	G : Gold Flash G10: Gold 10u" G15: Gold 15u" G30: Gold 30u"	S: Gold Flash S10: Gold 10u" S15: Gold 15u" S30: Gold 30u"	T: Tin 100u"

General Tolerance	
X. ± 0.50	X.° ± 5°
.X ± 0.20	.X° ± 2°
.XX ± 0.10	.XX° ± 1°
Units : mm	