

### FEATURES:


- Ultra-small size achieved universal series bus connector and cable.
- Both 4Pin type and 5Pin (One ID pin) type are 0.8mm pitch.
- 4Pin type is full compliant with current USB 1.0 specifications.
- 5Pin type is full compliant with current USB 2.0 specifications.
- Receptacle and plug housing are UL 94V-0 grade fire retardant.
- Gold plated contact ensure low contact resistance.
- To make sure your connections are perfect every time.
- EMI protection by shielding features.
- Ideal for connecting portable PCs as slim notebook PCs and handheld PCs to small, slim peripheral equipment (digital cameras, small mouse, PDA, MP3, Hub etc.).

### SPECIFICATIONS

USB253 SERIES (MINI TYPE)			
ELECTRICAL		MECHANICAL	
Voltage rating	30 VAC(rms)	Durability	1500 cycles
Current rating	1 Amp	Mating force	35N Max.
Contact resistance	50 mΩ Max.	Unmating force	2.9N Min.
Insulation resistance	100 MΩ Min.	---	---
Dielectric strength	100 VAC Min.	---	---



### PART NUMBERING SYSTEM



**1. Series**  
USB253


**2. Setting**  
3 = A Type (for 4Pin Only)  
4 = B Type (for 4Pin & 5Pin both)  
5 = C Type (for 5Pin Only)

**3. Port Type**  
1 = Single Port


**4. Color**  
0 = Black

**5. Terminal Pole**  
4 = 4 Pin  
5 = 5 Pin

**A TYPE CONNECTOR (4PIN)**

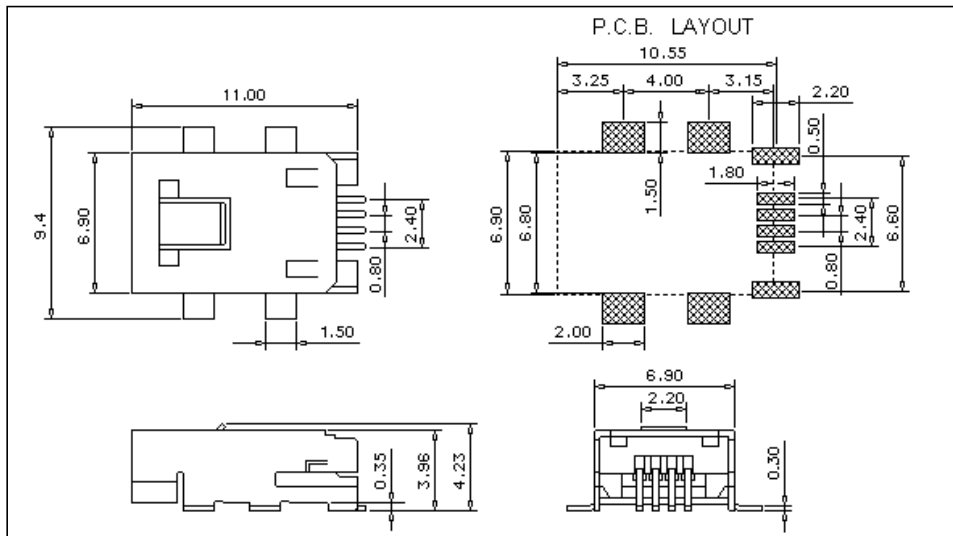

**B TYPE CONNECTOR (4PIN)**

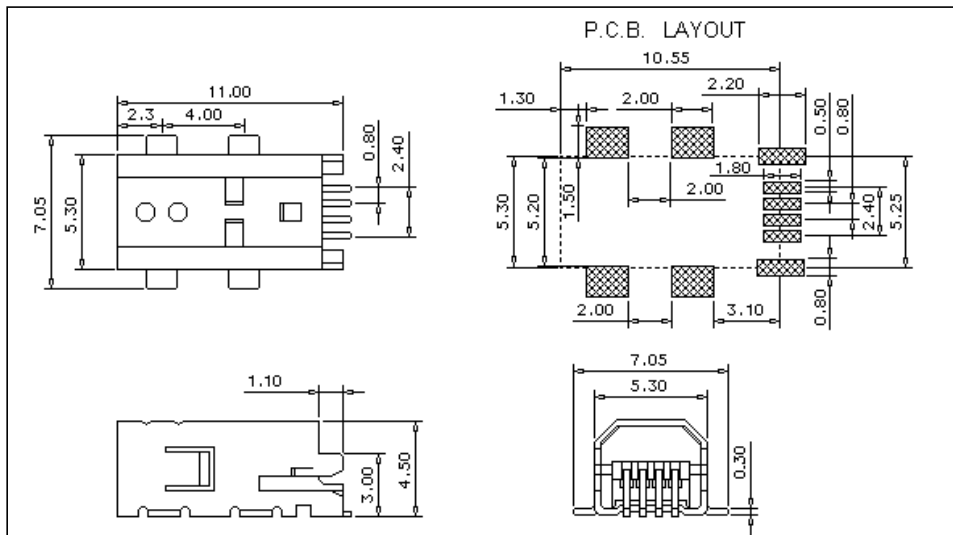

**B TYPE CONNECTOR (5PIN)**

