






TERMINAL BLOCKS (Flat Base)

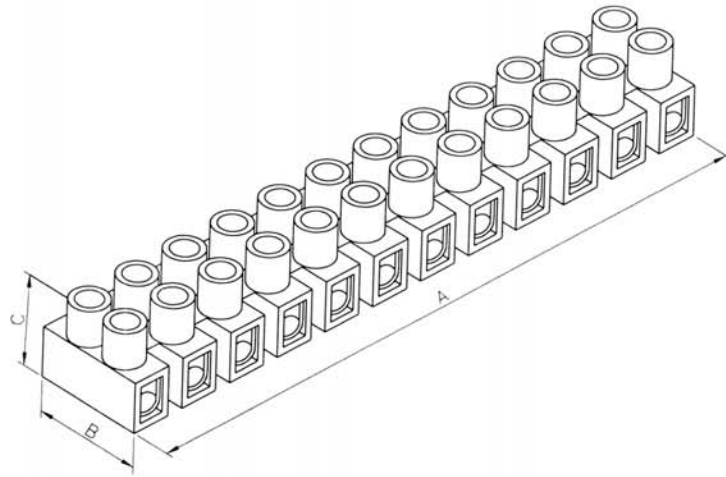

WT10F-03WP
 Series: Nil :w/o Wire Protector
 Pitch: WP:with Wire Protector
 Style F: Flat Base # of poles

Dimensions & Data :

Part #	mm ²	Amp	Volt.	Screw	Dimensions (mm/in.)							Packing
					Unit	A	B	C	D	E	F	
WT8F-□□	1.5	17.5A	450V	M2.6×5	(mm)	95.80	16.30	13.30	8.00	2.90	2.8±0.1	50 Pcs/Bag.
					(in)	3.772	0.642	0.524	0.315	0.114	0.110	500 Pcs/Carton
WT8F-□□WP	1.5	17.5A	450V	M2.6×5	(mm)	95.80	16.30	13.30	8.00	2.90	2.8±0.1	50 Pcs/Bag.
					(in)	3.772	0.642	0.524	0.315	0.114	0.110	500 Pcs/Carton
WT10F-□□	2.5	24A	450V	M3×6	(mm)	117.0	20.20	15.80	10.00	3.60	3.2±0.1	50 Pcs/Bag.
					(in)	4.626	0.795	0.622	0.394	0.142	0.126	500 Pcs/Carton
WT10F-□□WP	2.5	24A	450V	M3×6	(mm)	117.0	20.20	15.80	10.00	3.60	3.2±0.1	50 Pcs/Bag.
					(in)	4.626	0.795	0.622	0.394	0.142	0.126	500 Pcs/Carton

Description :

- * Base : With flat base.
- * Material : Polyamide 66 (Nylon 66), UL 94V2, Natural.
- * Working Temperature : 110°C.
- * Number of Poles : 12 poles.
- * Terminal Insert : Brass metal alloy, nickel plated.
- * Wire Protector (WP) : Stainless spring steel.
- * Screws : Zinc plated, yellow chromed.
- * Stripping Length : WT8F - 5.3mm (0.21 in)
WT10F - 7.3mm (0.29 in)

International Approvals :

Part #	Germany	U.S.A.	Sweden	Canada	Denmark	Norway	Finland	Holland	Austria	Belgium	Italy	Switzerland
WT8F-□□												
WT8F-□□WP	450V/17.5A	600V/20A	450V	400V/10A	400V	400V	400V	400V	400V	400V	400V	400V
WT10F-□□	1.5 mm ²	12-22AWG	1.5 mm ²	18-20AWG	1.5 mm ²	1.5 mm ²	1.5 mm ²	1.5 mm ²	1.5 mm ²	1.5 mm ²	1.5 mm ²	1.5 mm ²
WT10F-□□WP	450V/24A	600V/30A	450V	400V/20A	400V	400V	400V	400V	400V	400V	400V	400V
WT10F-□□WP	2.5 mm ²	10-22AWG	2.5 mm ²	14-18AWG	2.5 mm ²	2.5 mm ²	2.5 mm ²	2.5 mm ²	2.5 mm ²	2.5 mm ²	2.5 mm ²	2.5 mm ²