


Pitch: 8mm, 10mm,
12mm, 14 mm

TERMINAL BLOCKS (Polypropylen)

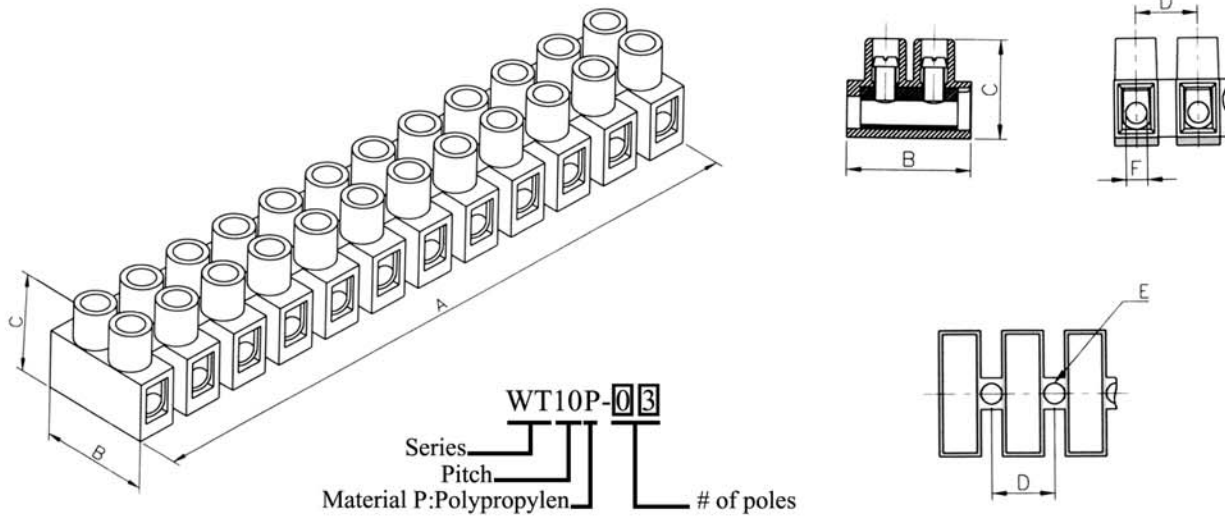

Dimensions & Data :

Part #	Nominal Sizes	Amp	Volt.	Screw	Dimensions (mm/in.)						Packing	
					Unit	A	B	C	D	E		F
WT8P-□□	2.5 mm ²	6A	450V	M2.6x5	(mm)	96.20	16.30	14.50	8.00	2.90	2.80	50 Pcs/Bag. 500 Pcs/Carton
					(in)	3.780	0.642	0.571	0.315	0.114	0.110	
WT10P-□□	4.0 mm ²	10A	450V	M3.0x6	(mm)	117.2	20.10	17.00	10.00	3.60	3.40	50 Pcs/Bag. 500 Pcs/Carton
					(in)	4.614	0.791	0.669	0.394	0.142	0.134	
WT12P-□□	6.0 mm ²	16A	500V	M3.5x7	(mm)	140.5	23.80	19.80	12.20	3.80	3.90	50 Pcs/Bag. 400 Pcs/Carton
					(in)	5.540	0.937	0.780	0.480	0.15	0.154	
WT14P-□□	10.0 mm ²	32A	500V	M4.0x9	(mm)	158.0	25.60	25.40	13.50	4.30	4.80	25 Pcs/Bag. 250Pcs/Carton
					(in)	6.220	1.008	1.000	0.531	0.169	0.189	

Description :

- *Base : With 0.8 - 1.2mm raised base.
- *Material : Polypropylen (PP), UL 94V-2 flame-retardant material.
- *Working Temperature : 85°C.
- * Terminal Insert : Brass metal alloy, nickel plated.
- * Screws : Zinc plated, yellow chromed.
- * Poles Available : 12 Poles.
- * Easy Self-Cutting design makes users more easier to break the Terminal blocks into desired numbers of pole.
- * Specific packing and private labeling required are available upon request.