


Pro Components

WT Series

Pitch: 8mm, 10mm

TERMINAL BLOCKS (High Foot Type)

(With 4.3 mm raised base)

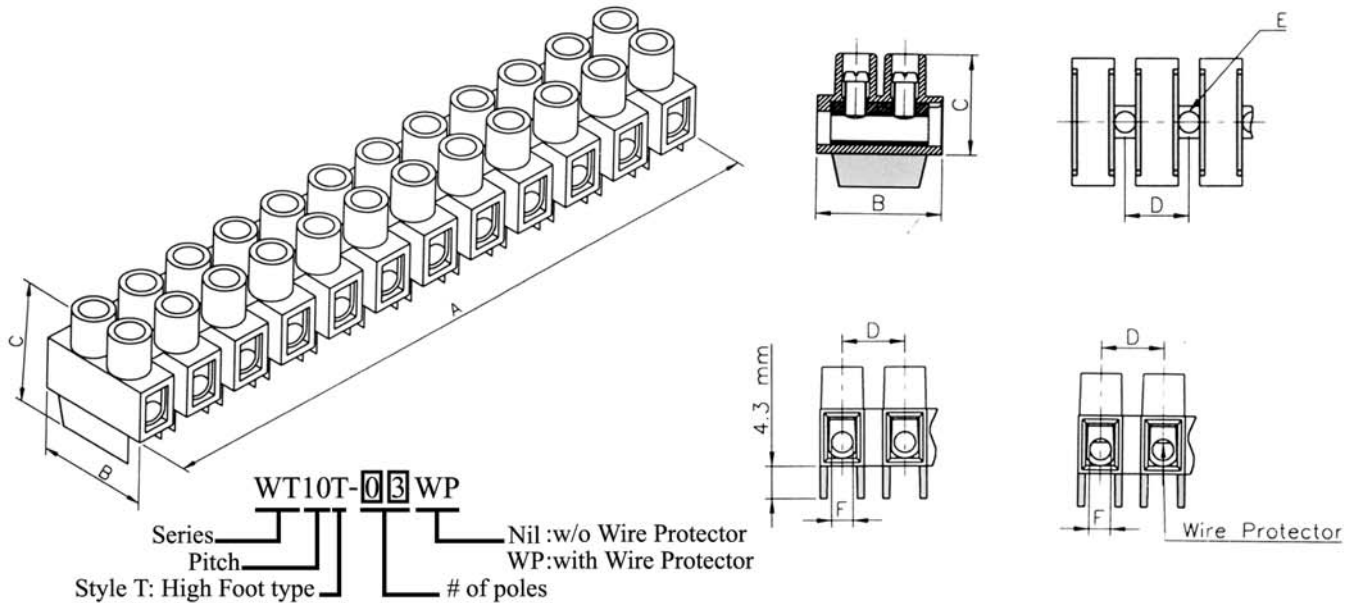

Dimensions & Data :

Part #	mm ²	Amp	Volt.	Screw	Dimensions (mm/in.)						Packing	
					Unit	A	B	C	D	E		F
WT8T-□□	1.5	17.5A	450V	M2.6×5	(mm)	96.00	16.30	16.90	8.00	2.90	2.8±0.1	50 Pcs/Bag.
					(in)	3.780	0.642	0.665	0.315	0.114	0.110	500 Pcs/Bag.
WT8T-□□WP	1.5	17.5A	450V	M2.6×5	(mm)	96.00	16.30	16.90	8.00	2.90	2.8±0.1	50 Pcs/Bag.
					(in)	3.780	0.642	0.665	0.315	0.114	0.110	500 Pcs/Bag.
WT10T-□□	2.5	24A	450V	M3.0×6	(mm)	117.0	20.20	20.10	10.00	3.60	3.2±0.1	50 Pcs/Bag.
					(in)	4.626	0.795	0.791	0.394	0.142	0.126	500 Pcs/Bag.
WP10T-□□WP	2.5	24A	450V	M3.0×6	(mm)	117.0	20.20	20.10	10.00	3.60	3.2±0.1	50 Pcs/Bag.
					(in)	4.626	0.795	0.791	0.394	0.142	0.126	500 Pcs/Bag.

Description :

- * Base : With 4.3mm raised base.
- * Material : Polyamide 66 (Nylon 66), UL 94V2, Natural.
- * Working temperature : 110°C.
- * Number of Poles : 12 poles.
- * Terminal Insert : Brass metal alloy, nickel plated.
- * Wire Protector (WP) : Stainless spring steel.
- * Screws : Zinc plated, yellow chromed.
- * Stripping Length : WT8T- 5.3mm (0.21 in)
WT10T - 7.3mm (0.29 in)

International Approvals :

Part #	Germany DVE	U.S.A. UL	Sweden S	Canada SP	Denmark D	Norway N	Finland FI	Holland KEWA	Austria OVE	Belgium CEREC	Italy M	Switzerland S
WT8T-□□	450V/17.5A	600V/20A	450V	400V/10A								
WT8T-□□WP	1.5 mm ²	12-22AWG	1.5 mm ²	18-20AWG								
WT10T-□□	450V/24A	600V/30A	450V	400V/20A								
WP10T-□□WP	2.5 mm ²	10-22AWG	2.5 mm ²	14-18AWG								