





FIFQC Series

Specifications

Maximum Electrical Rating: 75°C, 300 Volts Max.
 Insulation Material: Vinyl
 Terminal Material: Brass
 Double Crimp: With Copper Sleeve on Barrel
 Certification: UL/CUL/CSA

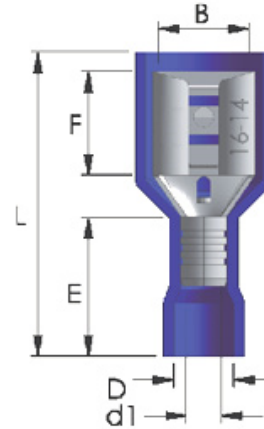

General Tolerance	
X. ± 0.50	X.° ± 5°
.X ± 0.20	.X° ± 2°
.XX ± 0.10	.XX° ± 1°
Units : mm	

Color	Part #	Wire Range Gauge	Maximum Electric Current	Tab Size	Dimensions (mm)					
					B	F	L	E	D	d1
	FIFQC22-16AWG-0.110A	22-16 AWG	10 Amps	0.020" x 0.110"	3.2	6.4	19.5	10.0	4.0	1.7
	FIFQC22-16AWG-0.110			0.032" x 0.110"	3.2	6.4	19.5			
	FIFQC22-16AWG-0.187A			0.020" x 0.187"	5.0	6.5	19.5			
	FIFQC22-16AWG-0.187			0.032" x 0.187"	5.0	6.5	19.5			
	FIFQC22-16AWG-0.250			0.032" x 0.250"	6.6	7.9	22.0			
	FIFQC16-14AWG-0.110A	16-14 AWG	15 Amps	0.020" x 0.110"	3.2	6.4	19.5	10.0	4.5	2.3
	FIFQC16-14AWG-0.110			0.032" x 0.110"	3.2	6.4	19.5			
	FIFQC16-14AWG-0.187A			0.020" x 0.187"	5.0	6.5	21.0			
	FIFQC16-14AWG-0.187			0.032" x 0.187"	5.0	6.5	21.0			
	FIFQC16-14AWG-0.250			0.032" x 0.250"	6.6	7.9	22.0			
	FIFQC12-10AWG-0.250	12-10 AWG	24 Amps	0.032" x 0.250"	6.6	7.9	25.0	13.0	5.5	3.4