
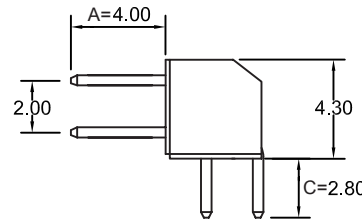
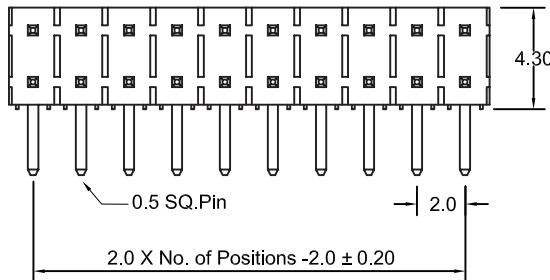


### Recommended P.C. Board Hole Layout



## Specifications

- Current Rating: 2 Amps
- Insulator Resistance: 1000 Megohms min.
- Contact Resistance: 20 m ohms max.
- Dielectric Withstanding: AC 600V
- Operating Temperature: -40°C~+105°C
- Contact Material: Brass
- Insulator Material: Polyester, UL 94V-0, Nylon-6T
- Contact Plated: \*see options below
- Standard: Full Gold Flash

## Part Numbering System

**RD200-H4.3 - XX - A-C - X**

- Series
- No. of Pins
- Terminal Dimensions Required  
A = ... , C = ...
- Contact Plating

**Example: RD200-H4.3-08-4.00-2.80-G**  
with 8 pins, A = 4.00, C = 2.8

* Contact Plating Option	Full Gold Plating	Gold Plated On Contact Area Tin Plated on Solder Area	Full Tin Plating
	G : Gold Flash G10: Gold 10u" G15: Gold 15u" G30: Gold 30u"	S: Gold Flash S10: Gold 10u" S15: Gold 15u" S30: Gold 30u"	T: Tin 100u"

General Tolerance	
X. ± 0.50	X.° ± 5°
.X ± 0.20	.X° ± 2°
.XX ± 0.10	.XX° ± 1°
Units : mm	