



FEATURES:

- Ultra-small size achieved universal series bus connector and cable.
- Both 4Pin type and 5Pin (One ID pin) type are 0.8mm pitch.
- 4Pin type is full compliant with current USB 1.0 specifications.
- 5Pin type is full compliant with current USB 2.0 specifications.
- Receptacle and plug housing are UL 94V-0 grade fire retardant.
- Gold plated contact ensure low contact resistance.
- To make sure your connections are perfect every time.
- EMI protection by shielding features.
- Ideal for connecting portable PCs as slim notebook PCs and handheld PCs to small, slim peripheral equipment (digital cameras, small mouse, PDA, MP3, Hub etc.).

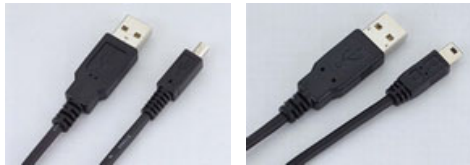

PART NUMBERING SYSTEM



1. Series

USB254 (Mini USB Cable (4 Pin))
USB255 (Mini USB Cable (5 Pin))

3. Cable Length

10 = 1.0M
18 = 1.8M
20 = 2.0M
30 = 3.0M
50 = 5.0M

5. Rating

0 = Full-Rate Channel
1 = Sub-Rate Channel

2. Setting

1 = A+Free type
2 = B+Free type
3 = A+B type
4 = A+A type
5 = B+B type
6 = A+housing
7 = B+housing
8 = Socket+housing
9 = Plug+housing
A = STD A+Mini B
B = STD A+Mini A
R = RS232 +Mini B

4. Wire Gauge

88 = AWG 28/28
68 = AWG 26/28
48 = AWG 24/28
28 = AWG 22/28
08 = AWG 20/28

6. Color

3 = Black
4 = Beige


◀ BACK

◀ INDEX


▶ NEXT

DIMENSIONS (UNIT: mm)


MINI USB A TYPE CABLE (4PIN)

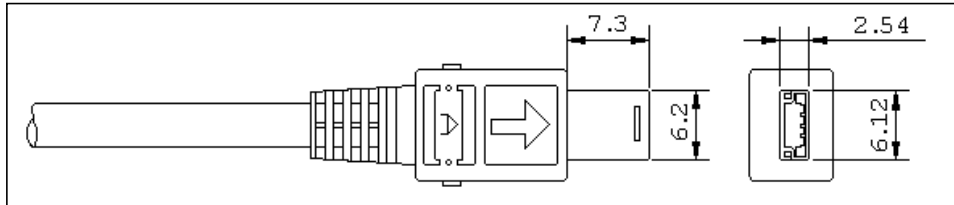

MINI USB B TYPE CABLE (4PIN)

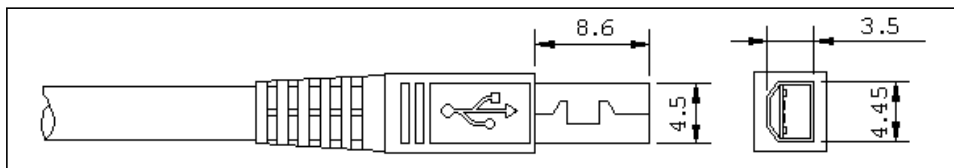

MINI USB B & C TYPE CABLE (5PIN)

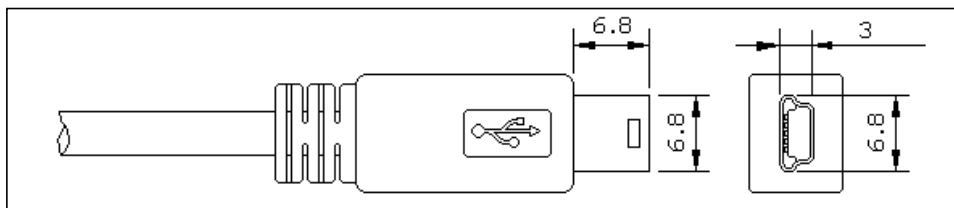

STANDARD USB A TYPE CABLE (PIN)

