



GENERAL PURPOSE RECTIFIER

P600A THRU P600M

VOLTAGE RANGE
CURRENT


50 to 1000 Volts
6.0 Ampere

FEATURES

- Low reverse leakage
- Low forward voltage
- High forward surge current capacity
- High temperature soldering guaranteed:
260 /10 seconds, 0.375" (9.5mm) lead length

MECHANICAL DATA

- Case: transfer molded plastic
- Epoxy: UL94V – 0 rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: any
- Weight: 0.07 ounce, 2.0 gram

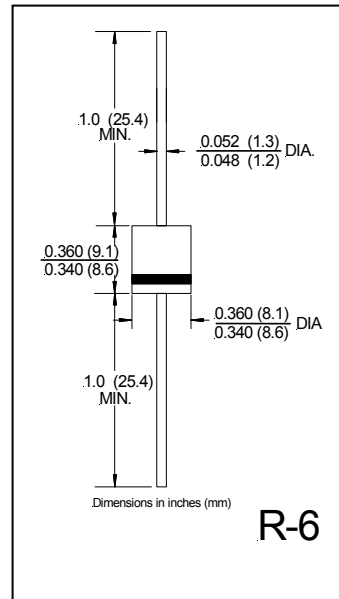

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	P600A	P600B	P600D	P600G	P600J	P600K	P600M	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current, 0.375" (9.5mm) lead length at $T_A = 60^\circ C$	$I_{(AV)}$	6.0							Amps
Peak Forward Surge Current	I_{FSM}	400							Amps
8.3mS single half sine wave superimposed on rated load (JEDEC method)									
Maximum Instantaneous Forward Voltage @ 6.0A	V_F	1.0							Volts
Maximum DC Reverse Current at Rated $T_A = 25^\circ C$	I_R	10.0							μA
DC Blocking Voltage per element $T_A = 100^\circ C$		1.0							mA
Maximum Full Load Reverse Current, full cycle Average 0.375" (9.5mm) lead length at $T_L = 105^\circ C$	$I_{R(AV)}$	1.0							mA
Typical Junction Capacitance (Measured at 1.0MHz and applied reverse voltage of 4.0V)	C_J	150							pF
Typical Thermal Resistance (Note 1)	$R_{\theta JA}$	10							$^\circ C/W$
Operating Junction Temperature Range	T_J	(-65 to +175)							$^\circ C$
Storage Temperature Range	T_{STG}	(-65 to +175)							$^\circ C$

Notes:

1. Thermal resistance from junction to ambient with 0.375" (9.5mm) lead length, PCB mounted with 0.2" x 0.2" (5.0mm x 5.0mm) copper pads



RATINGS AND CHARACTERISTIC CURVES P600A THRU P600M

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

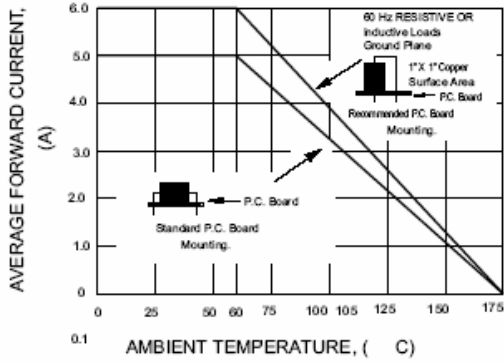


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

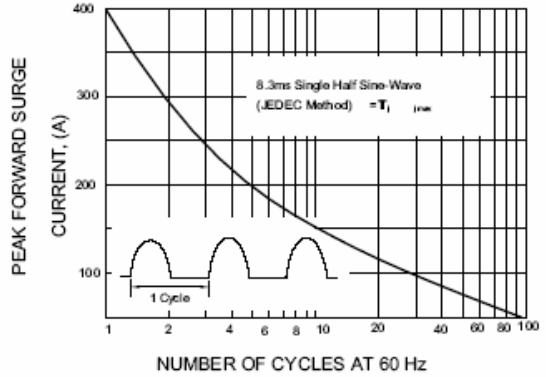


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

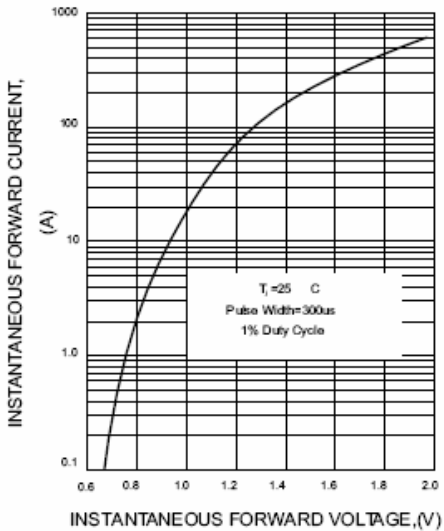


FIG.4-TYPICAL REVERSE CHARACTERISTICS

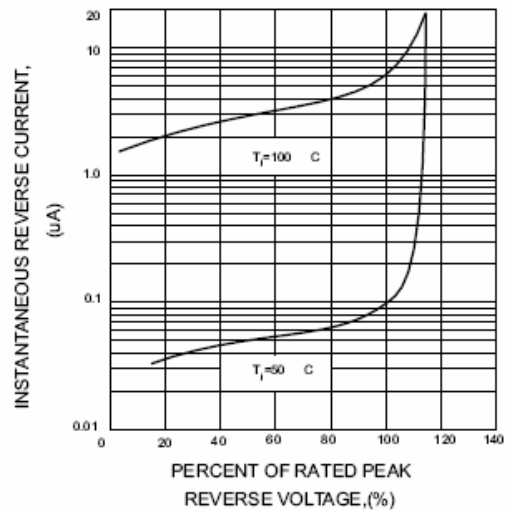


FIG.5-TYPICAL JUNCTION CAPACITANCE

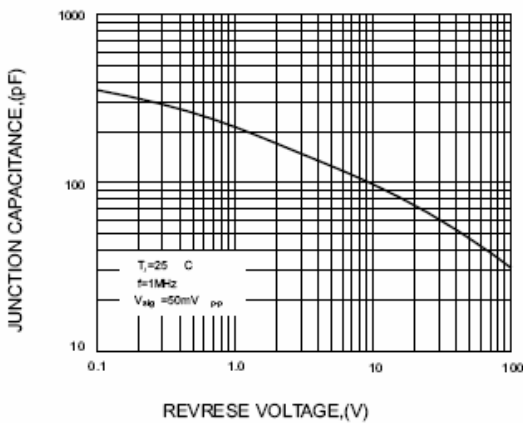


FIG.6-TYPICAL THERMAL RESISTANCE VS LEAD LENGTH

